TIMBERLUX

TimberLuxFloor.com

TIMBERLUX FLOORING (THAILAND) CO.,LTD

269/35 Moo 8, BO Win Subdistrict, Sriracha District, Chonburi Province, Thailand 20230

We are a Laminate Flooring Manufacturer In Thailand

25+ Years of Expertise, Global Warranty Support

เราเป็นโรงงานผลิตพื้นลามิเนตในประเทศไทย

TIMBERLUX

Versatile Bevel Options

Painted V-Groove

Crisp three-dimensional edges deliver a modern and clean aesthetic for contemporary interiors. Perfect for minimalist designs seeking depth and sophistication.

Pressed Bevel

Seamless texture integration mimics the authentic look of natural solid wood flooring, blending timeless charm with modern durability.

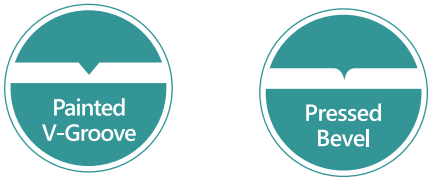

Thickness Flexibility

10mm – Light adaptability for versatile applications.

12mm – Enhanced durability and superior sound insulation.

EVA or IXPE Pad attached is Available.

Locking Systems

Unilin® Angle-Angle

Professional-grade installation system for flawless, gap-free results.

Valinge® 5G Dry

Waterproof performance for moisture-prone areas.

DIY-friendly design for long-board installation and gap-free result.

Versatile Length Configurations

Optimize spatial layouts and unleash design creativity with multiple plank length options. Ideal for customized patterns.

2200x231/230mm

1513x233/232mm

1513x192/190mm

1213x195mm

1818/1212/606x193/191mm RL

TIMBERLUX

3D EIR Surface

Embossed-in-Register Wood Grain

Perfectly aligned textures for unmatched realism, replicating the tactile feel of natural wood.
Unprecedented depth and natural authenticity.
Dynamic Gloss Contrast: **4-6° gloss** on flat surfaces & **0° gloss** within recessed grains

Super-Matt EIR Surface

Full 4-6° Gloss Finish

Ultra-matte elegance across all surfaces and recessed grains for a refined, understated look.
Precision-Replicated Textures, Capture the raw beauty of untreated timber, combining rugged charm with modern resilience.

Aqua-Safe

Waterproof core ensures moisture resistance, protecting against spills and humidity.
IN 8% Thickness swelling HDF plus WAX on 4 sides.

Diamond Wear Layer

AC4-Rated durability for heavy commercial or residential use.

Engineered for Every Space

From modern lofts to rustic retreats, our flooring solutions combine artistry, innovation, and uncompromising performance.

Define Your Exclusive-Design is Available!

10 mm Collection Features

WaterProof Laminate IN 8% Thickness Swelling
Made in Thailand with 0% Tariff and 0% Tax

TIMBERLUX

Finish	Bevel	Decor Color	HDF Color	WAX	HDF Compression	Formaldehyde Content	Abrasion Resistance	Warranty	FOB Port	MOQ	Pallet	Production Time
EIR	Painted V-Groove	Available	Brown	Yes	880 Kg/m³	CARB2 / EPA Certified	AC4	25 years residential limited warranty	Laem Chabang, Thailand	1 Color/Ctr	Engineered Pallet	80 days for first order
	Pressed Bevel Available*							5 years commercial limited warranty	Lat Krabang, Thailand			60 days for back order

UNILIN Angle-Angle Clip

Thickness	Width	Length	PCS/box	Boxes/Skid	Surface Area/Box	Weight/Box	Surface Area/Skid	Weight/Skid	Skid/Ctr	Surface Area/Ctr	Weight/Ctr
10 mm *	195 mm	1213 mm	8	5x11=55	1.8923 Sqm	16.7 Kg	104.0754 Sqm	927.5 Kg	40'-28 Skid	2914.1112 Sqm	25970 Kg
	7.68"	47.76"			20.3685 Sqft	36.82 lbs	1120.27 Sqft	2044.79 lbs		31367.493 Sqft	57253.98 lbs
10 mm *	192 mm	1513 mm	8	5x11=55	2.324 Sqm	20.5 Kg	127.8182 Sqm	1139.5 Kg	40'-22 Skid	2812.0013 Sqm	25069 Kg
	7.6"	59.57"			25.0152 Sqft	45.19 lbs	1375.84 Sqft	2512.16 lbs		30268.3818 Sqft	55267.62 lbs
10 mm *	233 mm	1513 mm	6	4x14=56	2.1333 Sqm	18.8 Kg	118.4497 Sqm	1053.6 Kg	40'-24 Skid	2842.7939 Sqm	25286.4 Kg
	9.17"	59.57"			22.7677 Sqft	41.01 lbs	1274.99 Sqft	2322.79 lbs		30599.8331 Sqft	55746.9 lbs
10 mm *	231 mm	2200 mm	5	4x14=56	2.541 Sqm	22.4 Kg	142.296 Sqm	1266.4 Kg	40'-20 Skid	2845.92 Sqm	25328 Kg
	9.1"	86.6"			27.3513 Sqft	49.38 lbs	1531.67 Sqft	2791.93 lbs		30633.4829 Sqft	55838.62 lbs

Valinge 2G-2G Clip

Thickness	Width	Length	PCS/box	Boxes/Skid	Surface Area/Box	Weight/Box	Surface Area/Skid	Weight/Skid	Skid/Ctr	Surface Area/Ctr	Weight/Ctr
10 mm	195 mm	1215 mm	8	5x11=55	1.8954 Sqm	16.7 Kg	104.247 Sqm	927.7 Kg	40'-28 Skid	2918.916 Sqm	25975.6 Kg
	7.68"	47.84"			20.4021 Sqft	36.82 lbs	1122.11 Sqft	2045.23 lbs		31419.2118 Sqft	57266.33 lbs
10 mm	193 mm	1515 mm	8	5x11=55	2.3392 Sqm	20.8 Kg	128.6538 Sqm	1156.2 Kg	40'-22 Skid	2830.3836 Sqm	25436.4 Kg
	7.6"	59.65"			25.1787 Sqft	45.86 lbs	1384.85 Sqft	2548.98 lbs		30466.2491 Sqft	56077.6 lbs
10 mm	235 mm	1515 mm	6	4x14=56	2.1362 Sqm	18.8 Kg	119.6244 Sqm	1065 Kg	40'-24 Skid	2870.9856 Sqm	25560 Kg
	9.25"	59.65"			22.9935 Sqft	41.45 lbs	1287.64 Sqft	2347.92 lbs		30903.289 Sqft	56350.09 lbs

Valinge 5G DRY Clip

Thickness	Width	Length	PCS/box	Boxes/Skid	Surface Area/Box	Weight/Box	Surface Area/Skid	Weight/Skid	Skid/Ctr	Surface Area/Ctr	Weight/Ctr
10 mm	190 mm	1513 mm	8	5x11=55	2.2998 Sqm	20.2 Kg	126.4868 Sqm	1123 Kg	40'-22 Skid	2782.7096 Sqm	24706 Kg
	7.48"	59.57"			24.7546 Sqft	44.53 lbs	1361.5 Sqft	2475.79 lbs		29953.0861 Sqft	54467.34 lbs
10 mm	232 mm	1513 mm	6	4x14=56	2.1061 Sqm	18.5 Kg	117.9414 Sqm	1048 Kg	40'-24 Skid	2830.593 Sqm	25152 Kg
	9.13"	59.57"			22.67 Sqft	40.79 lbs	1269.52 Sqft	2310.44 lbs		30468.5033 Sqft	55450.6 lbs
10 mm	230 mm	2200 mm	5	4x14=56	2.53 Sqm	22.3 Kg	141.68 Sqm	1260.8 Kg	40'-20 Skid	2833.6 Sqm	25216 Kg
	9.06"	86.6"			27.2329 Sqft	49.16 lbs	1525.04 Sqft	2779.58 lbs		30500.8704 Sqft	55591.7 lbs

12mm Collection Features

WaterProof Laminate IN 8% Thickness Swelling
Made in Thailand with 0% Tariff and 0% Tax

TIMBERLUX

Finish	Bevel	Decor Color	HDF Color	WAX	HDF Compression	Formaldehyde Content	Abrasion Resistance	Warranty	FOB Port	MOQ	Pallet	Production Time
EIR	Painted V-Groove	Available	Brown	Yes	880 Kg/m³	CARB2 / EPA Certified	AC4	25 years residential limited warranty	Laem Chabang, Thailand	1 Color/Ctr	Engineered Pallet	80 days for first order
	Pressed Bevel Available*							5 years commercial limited warranty	Lat Krabang, Thailand			60 days for back order

UNILIN Angle-Angle Clip

Thickness	Width	Length	PCS/box	Boxes/Skid	Surface Area/Box	Weight/Box	Surface Area/Skid	Weight/Skid	Skid/Ctr	Surface Area/Ctr	Weight/Ctr
12 mm *	195 mm	1213 mm	7	5x10=50	1.6557 Sqm	17.5 Kg	82.7873 Sqm	884 Kg	40'-28 Skid	2318.043 Sqm	24752 Kg
	7.68"	47.76"			17.8224 Sqft	38.58 lbs	891.12 Sqft	1948.88 lbs		24951.4149 Sqft	54568.75 lbs
12 mm *	192 mm	1513 mm	6	5x12=60	1.743 Sqm	18.4 Kg	104.5786 Sqm	1116 Kg	40'-22 Skid	2300.7283 Sqm	24552 Kg
	7.56"	59.57"			18.7614 Sqft	40.57 lbs	1125.68 Sqft	2460.36 lbs		24765.0396 Sqft	54127.83 lbs
12 mm *	233 mm	1513 mm	5	4x14=56	1.7626 Sqm	18.6 Kg	98.7081 Sqm	1053.6 Kg	40'-24 Skid	2368.9949 Sqm	25286.4 Kg
	9.17"	59.57"			18.9731 Sqft	41.01 lbs	1062.49 Sqft	2322.79 lbs		25499.8609 Sqft	55746.9 lbs
12 mm *	231 mm	2200 mm	4	4x14=56	2.0328 Sqm	21.5 Kg	113.8368 Sqm	1216 Kg	40'-20 Skid	2276.736 Sqm	24320 Kg
	9.11"	86.6"			21.8811 Sqft	47.4 lbs	1225.34 Sqft	2680.82 lbs		24506.7863 Sqft	53616.36 lbs
12mm	193 mm	1818/1212/606 RL	3+3+3	5x11=55	2.1052 Sqm	22.2 Kg	115.7884 Sqm	1233 Kg	40'-20 Skid	2315.7684 Sqm	24660 Kg
	7.6"	71.6"/47.7"/23.9" RL			22.6608 Sqft	48.94 lbs	1246.35 Sqft	2718.3 lbs		24926.9311 Sqft	54365.93 lbs

Valinge 5G DRY Clip

Thickness	Width	Length	PCS/box	Boxes/Skid	Surface Area/Box	Weight/Box	Surface Area/Skid	Weight/Skid	Skid/Ctr	Surface Area/Ctr	Weight/Ctr
12 mm	190 mm	1513 mm	6	5x12=60	1.7248 Sqm	18.2 Kg	103.4892 Sqm	1104 Kg	40'-22 Skid	2276.7624 Sqm	24288 Kg
	7.48"	59.57"			18.566 Sqft	40.12 lbs	1113.96 Sqft	2433.9 lbs		24507.0705 Sqft	53545.81 lbs
12 mm	232 mm	1513 mm	5	4x14=56	1.7551 Sqm	18.5 Kg	98.2845 Sqm	1048 Kg	40'-24 Skid	2358.8275 Sqm	25152 Kg
	9.21"	59.57"			18.8917 Sqft	40.79 lbs	1057.93 Sqft	2310.44 lbs		25390.4194 Sqft	55450.6 lbs
12 mm	230 mm	2200 mm	4	4x14=56	2.024 Sqm	21.4 Kg	113.344 Sqm	1210.4 Kg	40'-20 Skid	2266.88 Sqm	24208 Kg
	9.06"	86.6"			21.7863 Sqft	47.18 lbs	1220.03 Sqft	2668.47 lbs		24400.6963 Sqft	53369.44 lbs
12 mm	191 mm	1818/1212/606 RL	3+3+3	5x11=55	2.0834 Sqm	22 Kg	114.5885 Sqm	1222 Kg	40'-20 Skid	2291.7708 Sqm	24440 Kg
	7.52"	71.6"/47.7"/23.9" RL			22.426 Sqft	48.5 lbs	1233.43 Sqft	2694.05 lbs		24668.6209 Sqft	53880.91 lbs

Note

© 202517